


SECTION A-A
WITH PLYWOOD COVER
AND MACHINE SCREWS

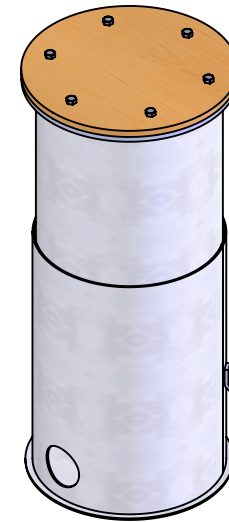

NOTE:

1. OPENINGS ARE ORIENTED 180° APART WITHIN ONE DEGREE. OTHER HOLE SIZES AND/OR LOCATIONS MUST BE SPECIFIED WHEN ORDERING.
2. PLYWOOD COVER IS 1/2" NOMINAL THICKNESS, GRADE CC, WITH Ø7/16" BOLT HOLES. PLYWOOD THICKNESS RUNS UNDERSIZED; ACTUAL THICKNESS IS 15/32" +0/-1/32".
3. OPTIONAL COPPER GROUND LUG, DRAIN COUPLING AND/OR OPENING MUST BE SPECIFIED WHEN ORDERING.
4. (2) Ø2" GROMMETS (STD) ARE SHIPPED UNASSEMBLED WITH BASE.
5. FINISH-HOT DIP GALVANIZED PER ASTM A123.
6. LIGHT BASE HEIGHT IS ADJUSTABLE FROM 19" TO 24".
7. L867 ADJUSTABLE LIGHT BASE MUST BE EMBEDDED IN PORTLAND CEMENT CONCRETE TO MEET LOAD REQUIREMENTS OF FAA.

DWN: DOUG F.

DATE: 7/14/2017

SCALE: NTS

SHEET 1 OF 1

L-867B Ø12" ADJUSTABLE LIGHT BASE,
24" MAX HEIGHT, W/GROMMETS



MILLERBERND

622 6TH ST. SO.
WINSTED, MN
55395

127ACG24PCC