


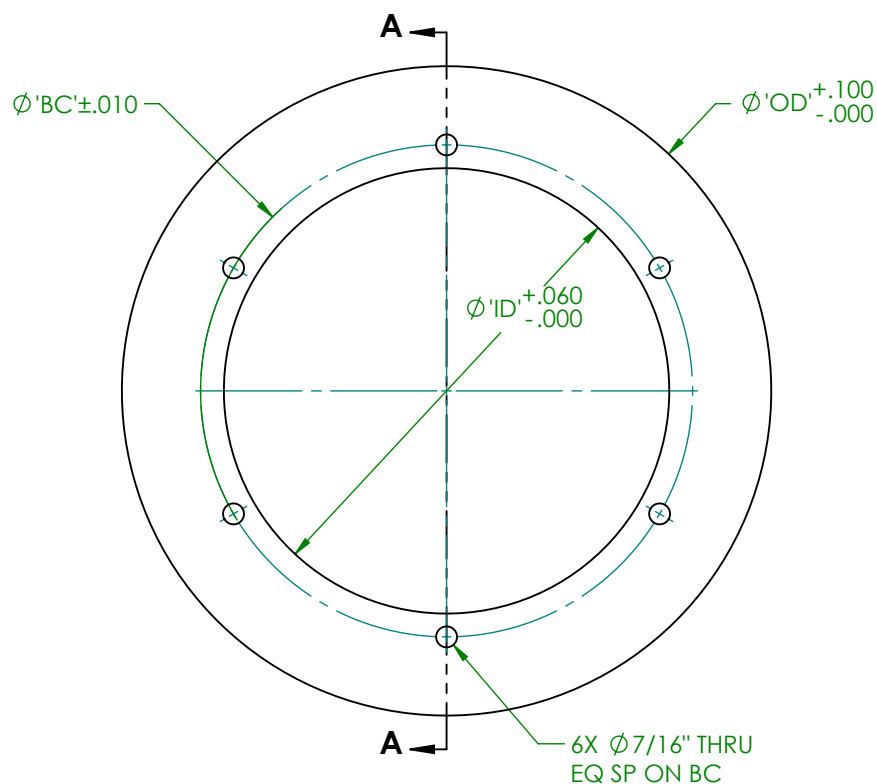

NOTE:

1. 'T' = THICKNESS IN SIXTEENTHS FROM 1/16" TO 1 11/16". SPECIFY WHEN ORDERING.
2. (6) 3/8-16 UNC STAINLESS STEEL HEX HEAD BOLTS ARE SHIPPED WITH L-867 SPACER. BOLT LENGTH IS BASED ON AND IS SUITABLE FOR THE THICKNESS OF THE SPACER ORDERED.
3. MATERIAL-ASTM A36 STEEL
4. FINISH-HOT DIP GALVANIZED PER ASTM A123.
5. PART NUMBERING:
 - L-867 12" DIA: MMC PN IS 127S(T)
 - L-867 16" DIA: MMC PN IS 167S(T)
 - L-867 24" DIA: MMC PN IS 247S(T)
 WHERE (T) IS THE THICKNESS TO ORDER
 EX. 12" DIA. L-867, 1 1/4" THICK: 127S0125

SECTION A-A

FAA TYPE	NOM DIA	'OD'	'BC'	'ID'
L-867B	12"	13.500	10.250	9.250
L-867D	16"	17.375	14.250	12.375
L-867E	24"	24.000	21.500	20.000

TOLERANCES UNLESS SHOWN
 FRACTIONAL $\pm 1/32"$
 DECIMAL $\pm .03$
 ANGLES $\pm 0^\circ 30'$

DWN: DOUG F.

DATE: 7/17/2017

SCALE: NTS

SHEET 1 OF 1

L-867B, L-867D & L-867E SPACERS-UNDER 1 3/4"



MILLERBERND

622 6TH ST. SO.
 WINSTED, MN
 55395

7S