
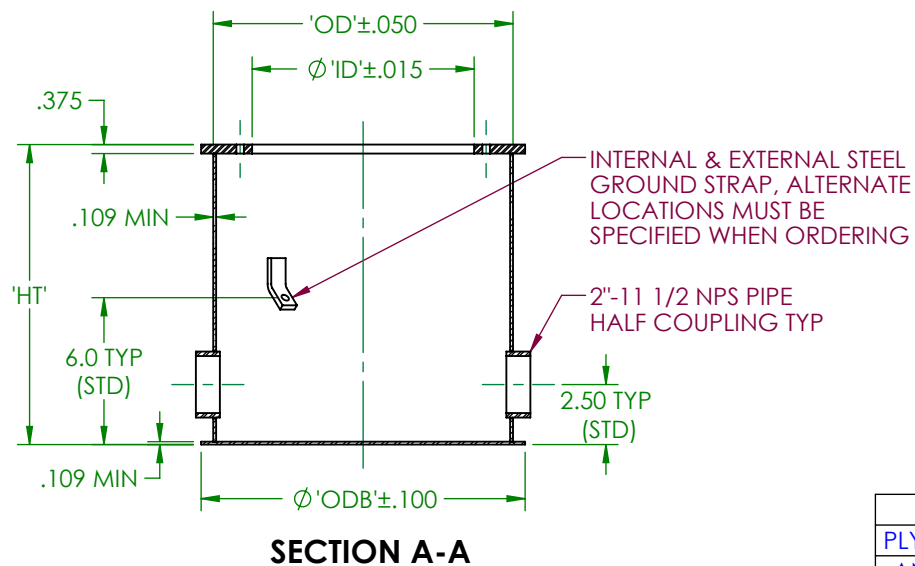


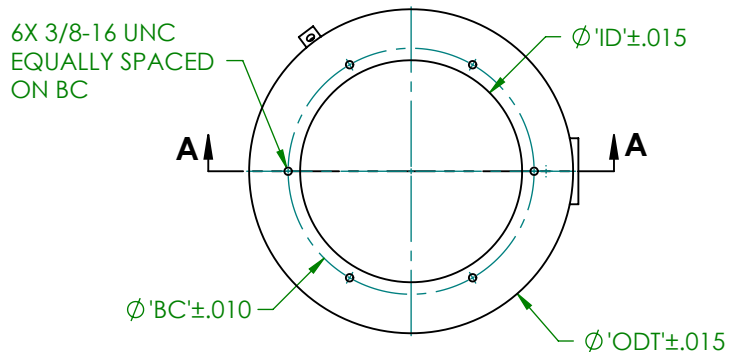

NOMINAL ϕ	'OD'	'BC'	'ID'	'ODB'	'ODT'
8"	8.500	6.250	5.250	9.000	9.000
12"	12.500	10.250	9.250	13.000	13.000
15"	15.500	13.250	12.375	16.000	16.000

TOLERANCES UNLESS SHOWN
FRACTIONAL $\pm 1/32$ "
DECIMAL $\pm .030$
ANGLES $\pm 0^\circ 30'$

NOTE:

1. 12 1/2" IS THE STANDARD HEIGHT; OTHER HEIGHTS ARE AVAILABLE. TOLERANCE IS $\pm 1/4$ ", PART NUMBER EXAMPLES:
• L-868 8" DIA: PN 88BSC125 (12 1/2" HGHT)
• L-868 12" DIA: PN 128BSC16 (16" HGHT)
• L-868 15" DIA: PN 158BSC125 (12 1/2" HGHT)
2. TAPPED HOLE PATTERN IN TOP FLANGE IS ALIGNED WITH CENTERLINE OF COUPLINGS WITHIN 1° .
3. COUPLINGS ARE ORIENTED 180° APART WITHIN ONE DEGREE. OTHER HOLE SIZES AND/OR LOCATIONS MUST BE SPECIFIED WHEN ORDERING.
4. THREADS INSIDE THE COUPLINGS ARE PROTECTED WITH LDPE PLUGS.
5. PLYWOOD COVER IS 3/4" THICK EXTERIOR GRADE CC, OR 5/8" THICK WHEN USED WITH MUD PLATE, WITH $\phi 7/16$ " BOLT HOLES. PLYWOOD THICKNESS RUNS UNDERSIZED; 3/4" ACTUAL THICKNESS IS $23/32$ " $+0/-1/32$ ".
6. (6) 3/8-16 UNC X 1" LONG STAINLESS STEEL HEX HEAD BOLTS WITH CEC LOCK WASHERS ARE INCLUDED.
7. OPTIONAL COPPER GROUND LUG, DRAIN COUPLING AND/OR OPENING, ANTI-ROTATION FINS AND/OR ANTI-ULIFT BARS MUST BE SPECIFIED WHEN ORDERING.
8. FINISH-HOT DIP GALVANIZED PER ASTM A123.

GROUND LUG	EXT		INT		—	—	—	—
PLYWOOD THICKNESS	STD		OTHER					
ANTI-ROTATION FINS	#		HT/LOCATION					
ANTI-ULIFT BARS	#							
DRAIN HOLE & TYPE	SIZE					OTHER		
OPENING LOCATION		0°	90°	180°	270°			
OPENING SIZE	STD 2"							
	OTHER							
STACKED	#							
OPENING HT.	STD							
STD 2 1/2" FROM BTM	OTHER							

DWN: DOUG F.

DATE: 7/26/2017

SCALE: NTS

SHEET 1 OF 1

L-868 BOTTOM SECTION W/COUPLINGS, $\phi 8$ ", $\phi 12$ " AND $\phi 15$ "



MILLERBERND

622 6TH ST. SO.
WINSTED, MN
55395

8BSC