


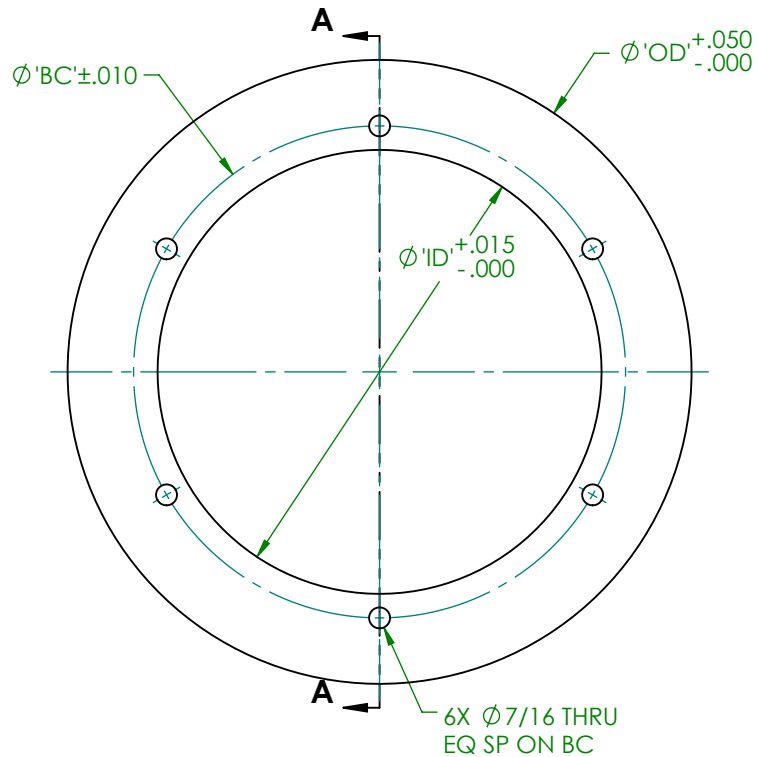

SECTION A-A

NOM DIA	'OD'	'BC'	'ID'
8"	9.000	6.250	5.250
12"	13.000	10.250	9.250
15"	16.000	13.250	12.375

NOTE:

1. 'T' = THICKNESS IN SIXTEENTHS FROM 1/16" TO 1 15/16". SPECIFY WHEN ORDERING.
2. (6) 3/8-16 UNC STAINLESS STEEL HEX HEAD BOLTS AND CEC LOCK WASHERS ARE SHIPPED WITH L-868 SPACER. BOLT LENGTH IS BASED ON AND IS SUITABLE FOR THE THICKNESS OF THE SPACER ORDERED.
3. MATERIAL-ASTM A36 STEEL
4. FINISH-HOT DIP GALVANIZED PER ASTM A123.
5. PART NUMBERING:
 - L-868 8" DIA: MMC PN IS 88SMB(T)
 - L-868 12" DIA: MMC PN IS 128SMB(T)
 - L-868 15" DIA: MMC PN IS 158SMB(T)
 WHERE (T) IS THE THICKNESS TO ORDER
 EX. 12" DIA. L-868, 1 1/4" THICK: 128SMB125

TOLERANCES UNLESS SHOWN
 FRACTIONAL $\pm 1/32"$
 DECIMAL $\pm .03$
 ANGLES $\pm 0^\circ 30'$

DWN: DOUG F.

DATE: 8/10/2017

SCALE: NTS

SHEET 1 OF 1

L-868 SPACER RING-MIDDLE & BOTTOM SECTIONS



MILLERBERND 622 6TH ST. SO.
 WINSTED, MN
 55395

8SMB