



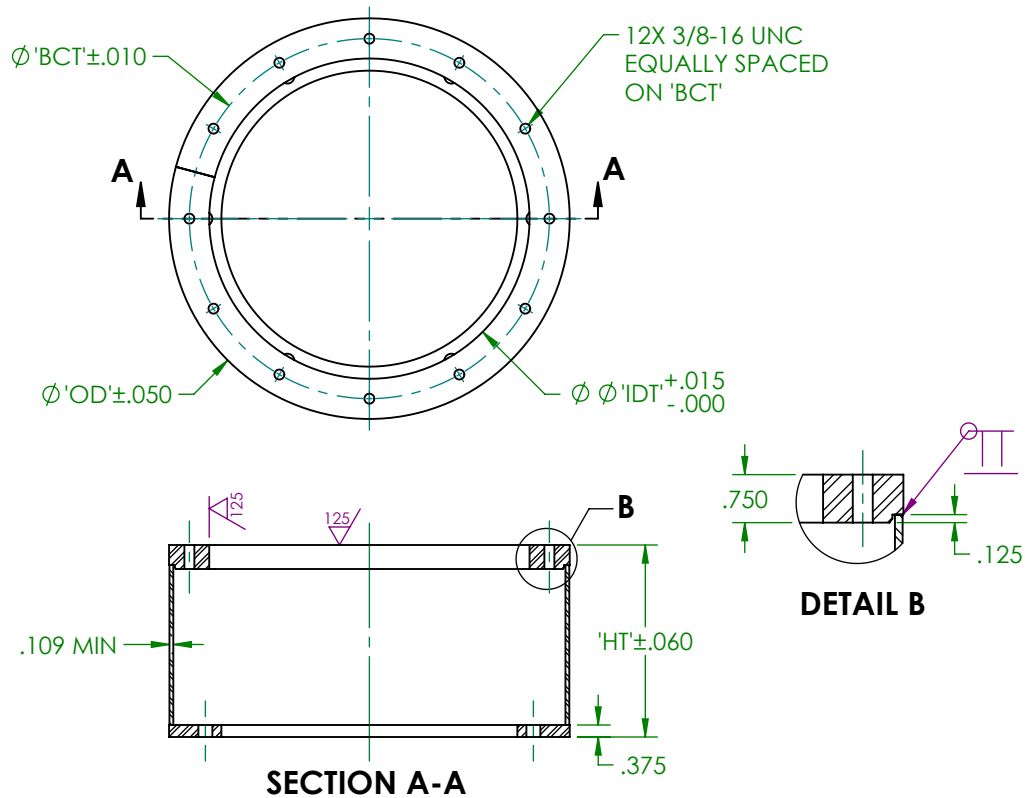

SECTION A-A

DETAIL B

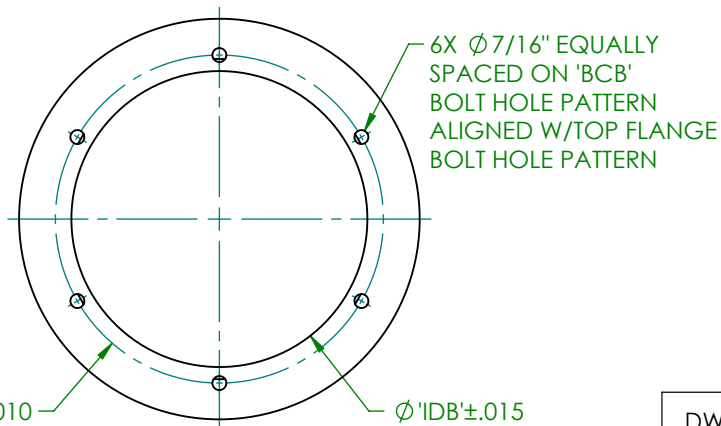

NOTE:

1. 'HT'= HEIGHT TO ORDER. MINIMUM HEIGHT IS 2.0" WHEN USED IN OVERLAY PAVING.
2. (6) 3/8-16 UNC X 1" LG STAINLESS STEEL HEX HEAD BOLTS AND CEC LOCK WASHERS ARE SHIPPED WITH THE L-868 TOP SECTION.
3. PLYWOOD COVER FOR L-868 TOP SECTION IS 3/4" NOMINAL THICKNESS, GRADE CC, WITH $\phi 7/16"$ BOLT HOLES. PLYWOOD THICKNESS RUNS UNDERSIZED; ACTUAL THICKNESS IS 23/32" $+0/-1/32"$. PLYWOOD COVER DIAMETERS:
 - L-868 8" NOM. OD: $\phi 8 \frac{1}{2}"$
 - L-868 12" NOM OD: $\phi 12 \frac{1}{2}"$
 - L-868 15" NOM OD: $\phi 15 \frac{1}{2}"$
4. FINISH-HOT DIP GALVANIZED PER ASTM A123.
5. PART NUMBERING:
 - L-868 12" DIA: MMC PN IS 88TS(HT)
 - L-868 16" DIA: MMC PN IS 128TS(HT)
 - L-868 24" DIA: MMC PN IS 158TS(HT)
 WHERE (HT) IS THE HEIGHT TO ORDER
 EX. 12" DIA. L-868, 4 1/8" HIGH: 128TS04125
6. OPTIONS: (3) OR (4) ANTI-ROTATION FINS (3/16" X 3/4" X 3") OR LOAD RING MUST BE SPECIFIED WHEN ORDERING.

NOM DIA	'OD'	'BCT'	'BCB'	'IDT'	'IDB'
8"	8.500	7.250	6.250	6.500	5.250
12"	12.500	11.250	10.250	10.000	9.250
15"	15.500	14.250	13.250	13.000	12.375

LOAD RING	YES		NO	
PLYWOOD THICKNESS	STD.			
	OTHER			
ANTI-ROTATION FINS	#			
HEIGHT/LOCATION				

DWN: DOUG F.

DATE: 8/1/2017

SCALE: NTS

SHEET 1 OF 1

L-868 TOP SECTION, $\phi 8"$, $\phi 12"$ & $\phi 15"$



MILLERBERND 622 6TH ST. SO.
WINSTED, MN
55395

8TS