



L867 1A SPACER RING

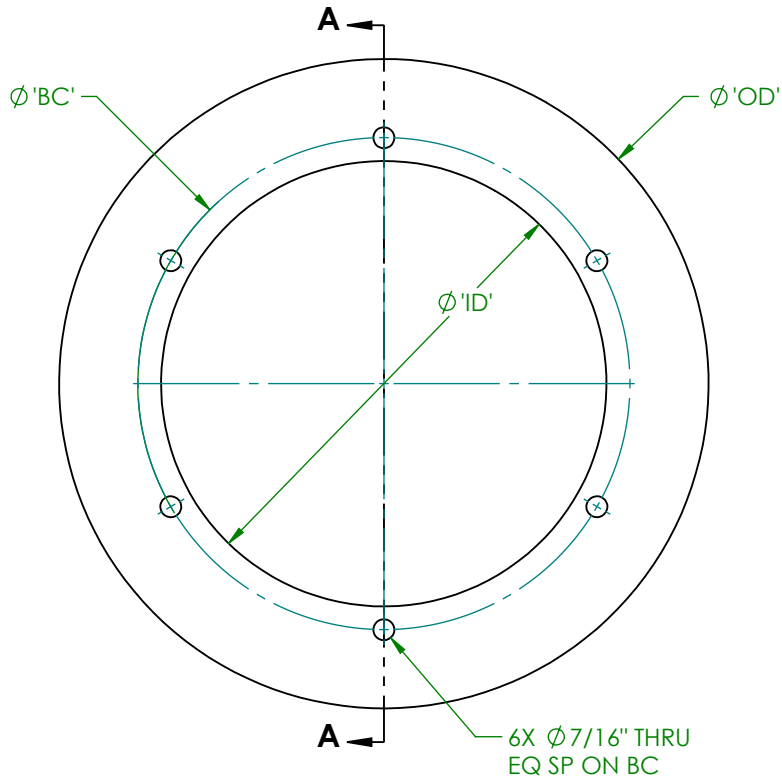

SECTION A-A

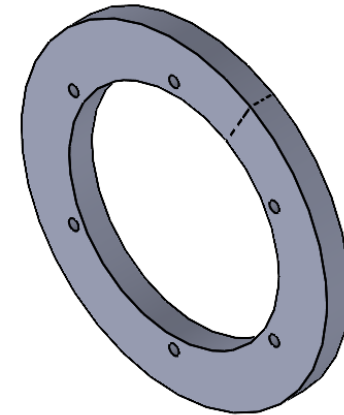

NOTE:

1. THIS PRODUCT IS CERTIFIED PER FAA ADVISORY CIRCULAR AC150/5345-42 (CURRENT REV).
2. T= THICKNESS IN SIXTEENTHS FROM 1/16" TO 1 11/16". SPECIFY WHEN ORDERING.
3. MATERIAL-ASTM A36 STEEL. STAINLESS STEEL IS AVAILABLE AS AN OPTION; SPECIFY WHEN ORDERING.
4. CARBON STEEL RINGS GREATER THAN 1/4" THICK ARE HOT DIP GALVANIZED PER ASTM A123. CARBON STEEL RINGS 1/4" THICK OR LESS ARE ZINC PLATED PER ASTM B633 TYPE II CLASS I OR HIGHER.

FAA TYPE	NOM DIA	MMC TYPE	'OD'	'BC'	'ID'
L-867B	12"	127S	13.500	10.250	9.250
L-867D	16"	167S	17.375	14.250	12.375
L-867E	24"	247S	24.000	21.500	20.000

DWN: DOUG F.	L-867 SPACERS		
DATE: 7/17/2017			
SCALE: NTS		622 6TH ST. SO. WINSTED, MN 55395	7S
SHEET 1 OF 1			